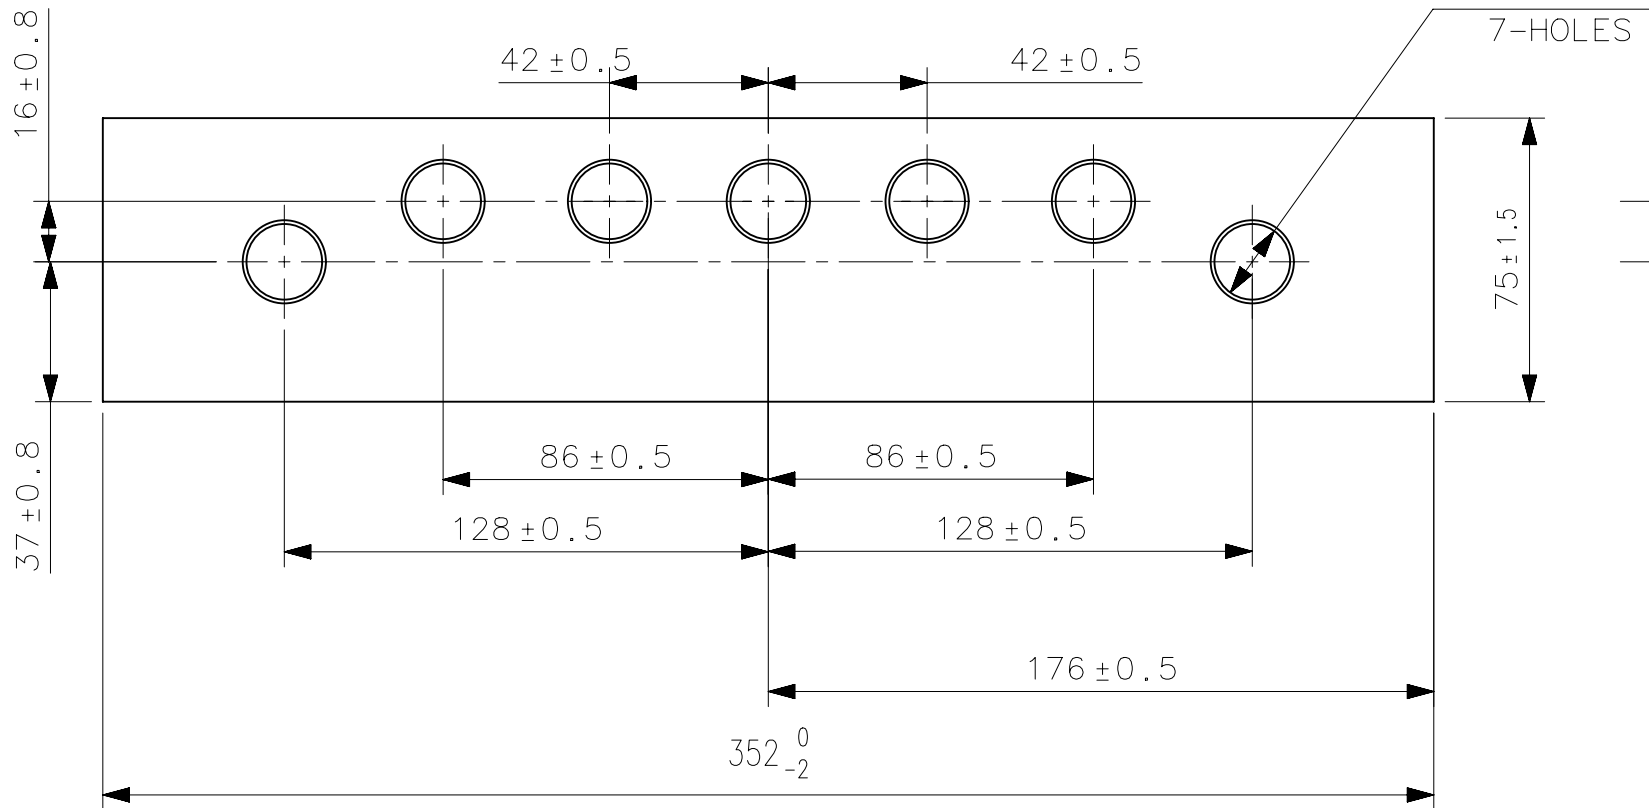



NOTES:-
PART TO BE FREE FROM BURRS & SHARP EDGES.

ER17C0004669	AC		ER RELEASE	MMP	RPK	SAB	25.01.18
ECN17P001708	AB		L2 RELEASE	SSP	RPK	SAB	21.03.17
----	AA	--	AS PER LO FEEDBACK	SPR	RPK	SAB	26.06.15
E.R.NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE

<SC> :SIGNIFICANT CHARACTERISTICS ▽ :CRITICAL CHARACTERISTICS									
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.					MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI(EAST), MUMBAI 400 101, INDIA.				
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989					E.R. / PROC.REQ.NO :		PART NO. :		
DIMENSIONS					ER17C0004669		008005846C1		
LINEAR IN mm.	OVER UPTO	0.5 3	3 6	6 30	30 120	120 400	400 1000	1000 2000	2000 4000
f FINE	(X.XXX)	± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-
m MEDIUM	(X.XX)	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
c COARSE	(X.X)	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4
v VERY COARSE	(X)	-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8
ANGULAR IN deg.		LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.							
		OVER UPTO	- 10	10 50	50 120	120 400	400 -		
f FINE	(X.XXX)	± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'			
m MEDIUM	(X.XX)	± 1° 30'	± 1°	± 0° 30'	± 0° 15'	± 0° 10'			
c COARSE	(X.X)	± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'			
v VERY COARSE	(X)	± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'			
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.									
COMPUTER GENERATED DRAWING			DO NOT CHANGE MANUALLY						
IF IN DOUBT, ASK		DO NOT SCALE		DRG SIZE : A4					
ALL DIMENSIONS ARE IN mm.					CHECK DRG WITH LATEST CHANGE No				

PART NAME :				FRONT TOP-MTG. BRKT.			
MATERIAL : E250 AS PER IS 2062:2011				HEAT TREATMENT : ----			
	NAME	SIGN	DATE	FIRST USED TRCR. MODEL			
CAD ENGG.	SPR	-SD-	26.06.15	MSTAR 85-95 HP			
DESIGNER	SPR	-SD-	26.06.15	SCALE 1:2			
CHECKER	RPK	-SD-	26.06.15	SHEET 1 OF 1			
APPR.BY	SAB	-SD-	26.06.15	UNIT QTY. : 1			
				WEIGHT : 2.27 kg.			